


GENERAL NOTES:

1. 4" REINFORCED CONCRETE SLAB TO BE FOUNDATION, IF AND ONLY IF EXISTING. CONCRETE PAD CANNOT BE LOCATED AT PROJECT SITE.
2. SHED INTERFERE SPACE MUST BE & PROVIDE CLEARANCE FOR THE STORAGE OF 2 PEGS TURN MOWER, PUSH MOWER, BUSED EXTERIOR & OTHER LAWN CARE EQUIPMENT.
3. SPACE SHOULD BE WELL VENTILATED
4. LIDC OF SHELBY COUNTY MAY REQUIRE SCREENING OR EXTERIOR FINISH.
5. RECOMMENDATION - LOCATE EXISTING CONCRETE PAD. IF LOCATED, 8" CMU TO BE SECURED TO EXISTING PAD BY #4 @ 6" REBAR EPOXIED INTO EXISTING CONC. SLAB.
* IF NO EXISTING CONCRETE SLAB DETERMINED, USE SLAB DETAIL ON BLDG. SECTION FOR PRICING.
6. ALL FASTENERS USED IN CONSTRUCTION MUST BE EXTERIOR GRADE OR COATED TO MINIMIZE CORROSION & ALL REACTIONS BETWEEN DISSIMILAR MATERIALS.

Handwritten signature
 9/17/2021
 1 of 2

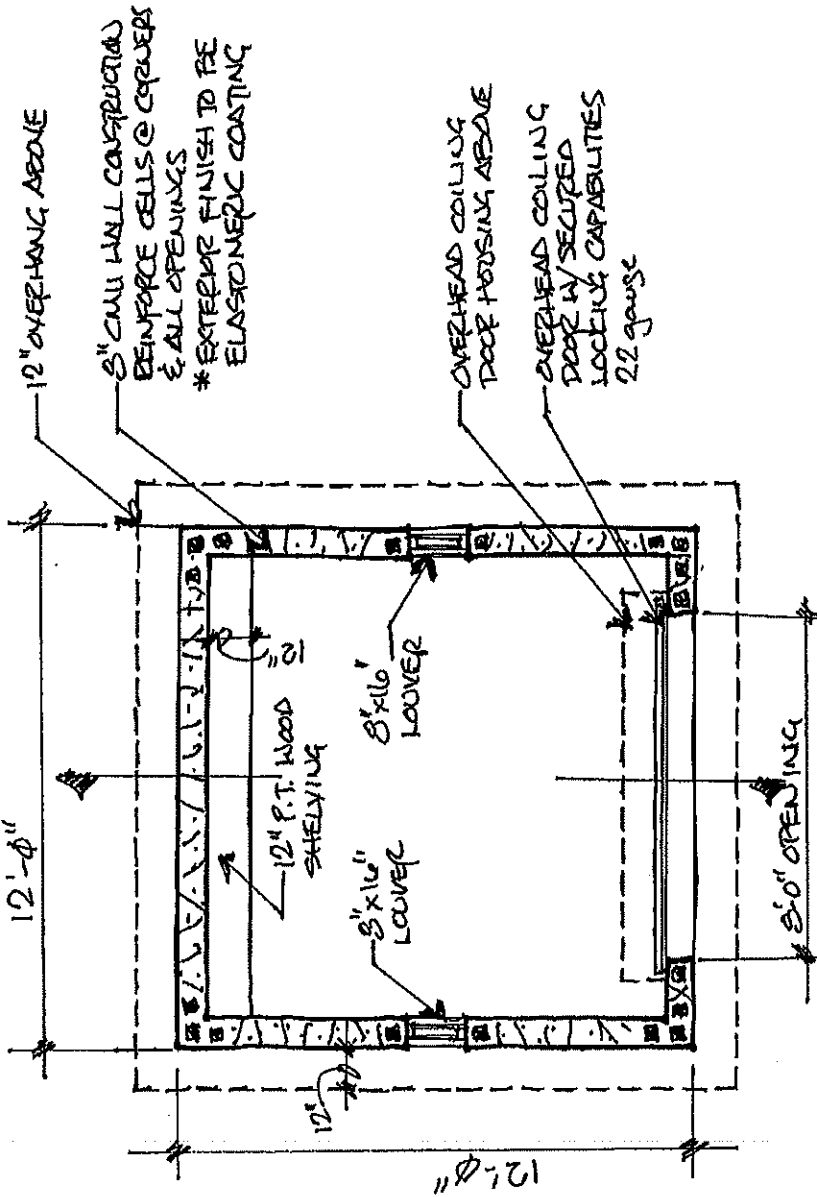

CONCEPTUAL FLOOR PAN - FRAMING ONLY
SCALE: N.T.S.

- * DESIGN IS CONCEPTUAL IN NATURE & SHALL BE USED FOR PRICING ONLY, NOT FOR CONSTRUCTION
- * ALTERNATE DESIGN PROPOSALS WILL BE CONSIDERED FOR APPROVAL. PROPOSALS MUST BE RECEIVED IN A TIMELY MANNER TO BE CONSIDERED.